
4-WAY 7-SPEAKER SYSTEM

LS-P9200 SERVICE MANUAL

KENWOOD

© 1989-5 PRINTED IN JAPAN B51-3946-00 (O) 341

EXTERNAL VIEW

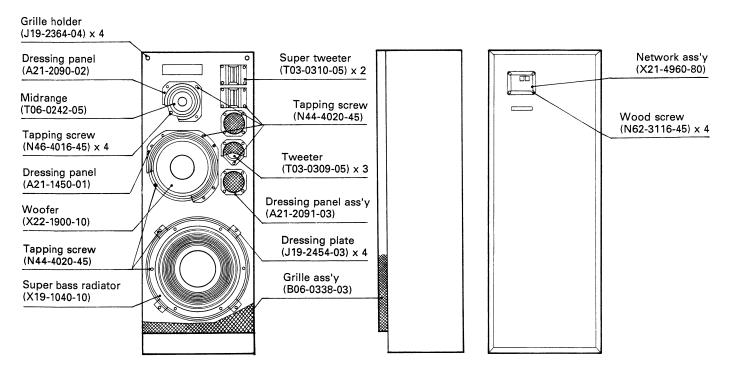


SPECIFICATIONS

System	4-Way 7-Speaker System
	Super Bass Radiator, Floor Standing
	Type
Loudspeakers	
Woofer	270 mm (10-1/2 in) Polypropylene
	Cone Type
Midrange	110 mm (4-1/2 in) Polypropylene
	Cone Type
	50 mm (2 in) Cone Type×3
	30 mm (1-1/4 in) Leaf Type x 2
Super Bass Radiator	430 mm (17 in) Polypropylene Con-
	Туре
Nominal Impedance	
Peak Input Power	400 Watts
Sensitivity	
Frequency Response	20 Hz to 48,000 Hz
Crossover Frequency	1,200 Hz, 5,000 Hz, 10,000 Hz
Terminals	Push-Lever Type
Dimensions	Width: 440 mm (17-5/16 in)
	Height: 1,185 mm (46-5/8 in)
	Depth: 332 mm (13-1/16 in)
Net Weight	26 kg (57 lbs)
	High density particle board laminate
	with simulated wood grain vinyl.
Accessories	Speaker Wire

SCHEMATIC DIAGRAM

NETWORK ASS'Y (X21-4960-80)

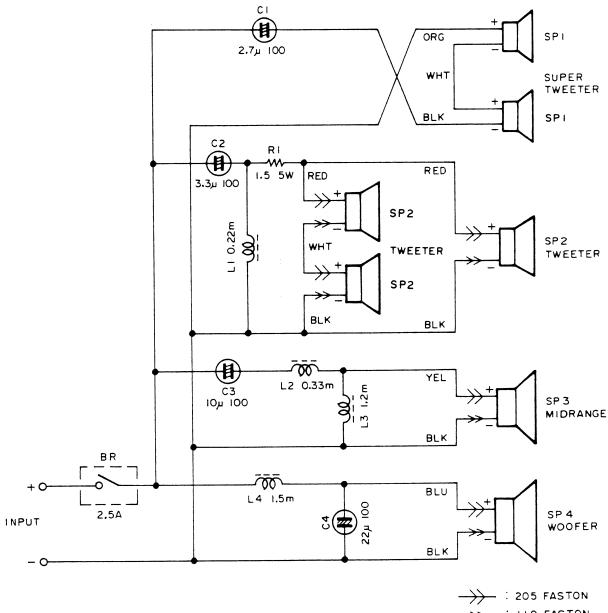

LS-P9200

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis. Teile ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Parts	Parts No.	Description Desti	1 .
		L	L	S-P9200	
-		*	A21-1450-01 A21-2090-02 A21-2091-03	Dressing panel Woofer Dressing panel Midrange Dressing panel ass'y Tweeter	
- - - -		* *	B06-0338-03 B46-0094-03 B46-0095-03 B61-0151-00 B61-0152-00	Grille ass'y Warranty card Warranty card U Instruction manual Instruction manual U U U	
_			E30-1003-05	Speaker cord	
- - - -		* * *	H01-6605-04 H01-6608-04 H10-3300-03 H10-4065-04 H11-0570-04	Carton box Carton box Polystyrene foamed fixture Polystyrene foamed fixture Polystyrene plate	
_ _		*	H21-1000-04 H25-0944-04	Protection sheet Protection bag U	
-			J19-2364-04 J19-2454-03	Grille holder Dressing plate (Super bass radiator)	
_ _ _			N44-4020-45 N46-4016-45 N62-3116-45	Tapping screw Tapping screw Wood screw	
SP1 SP2 SP3		* *	T03-0310-05 T03-0309-05 T06-0242-05	Super tweeter Tweeter Midrange	
- SP4 -		*	X19-1040-10 X22-1900-10 X21-4960-80	Super bass radiator Woofer Network ass'y	
	1		NETWORK .	ASS'Y (X21-4960-80)	
C1 C2 C3 C4			C90-1098-05 C90-1099-05 C90-1105-05 C90-1109-05	NP-electro 2.7μF 100WV NP-electro 3.3μF 100WV NP-electro 10μF 100WV NP-electro 22μF 100WV	
-			E29-0705-05	Terminal board	
L1 L2 L3 L4			L38-0201-05 L38-0202-05 L38-0322-05 L38-0305-05	Coil 0.22mH Coil 0.33mH Coil 1.2mH Coil 1.5mH	
-			N50-3008-45	Tapping screw	
R1			RS14GB3H1R5JMA	FL-proof RS 1.5Ω J 5W	
BR			W02-0166-05	Circuit protector 2.5A	
BR			W02-0166-05	Circuit protector 2.5A	

E: Scandinavia & Europe K: USA U : PX (Far East, Hawaii)

T : England

P : Canada M : Other Areas

LS-P9200

PACKING

